


pewag VMWP Enlarged master link assembly

True greatness for your load.

A load capacity according to G12, BG-approval and manufacturing according to EN 1677-4 are powerful arguments in favour of this universally usable master link assembly to create II-, III- and IV-leg chain slings for all chain dimensions.

Thanks to the flattened section on the transition links, this IV-leg assembly is also compatible with assembly types other than Connex CWP. The surface of the master link has a light blue powder coating. Refer to the table for the correct chain dimension.

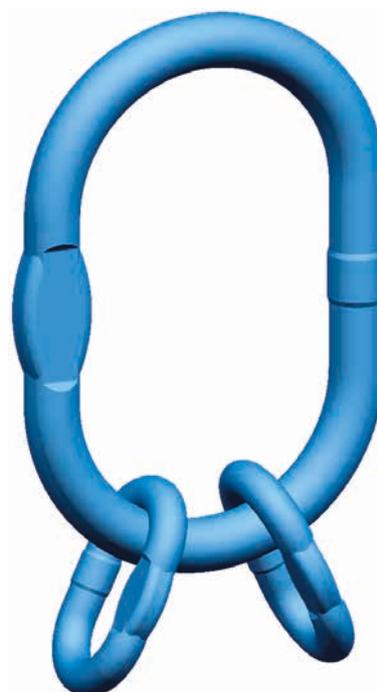

VMWP Enlarged master link assembly	Code	Consisting of	Can be used up to single hook according to DIN 15401 no.	Load capacity 0°-45° [kg]	e [mm]	d [mm]	t [mm]	w [mm]	d1 [mm]	t1 [mm]	w1 [mm]	Weight [kg/pc.]	For 2-leg slings	For 3- and 4-leg slings
	VMWP 7/8	MWP 18 + 2 BWP 13	6	4,250	214	19	160	95	13	54	25	1.47	7+8	-
	VMWP 10/7/8	MWP 26 + 2 BWP 16	10	8,800	260	27	190	110	17	70	34	3.45	10	7+8
	VMWP 13/10	MWP 32 + 2 BWP 20	12	12,300	315	33	230	130	20	85	40	6.28	13	10
	VM-WP -/13	MWP 36 + 2 BWP 26	20	21,200	415	38	275	150	27	140	65	11.50	-	13
	VM-WP -/16	MWP 36 + 2 BWP 32	20	26,500	425	38	275	150	33	150	70	13.80	-	16