

# pewag CWI Connex connecting link

## For a seamless connection.


This stainless steel connecting link is drop-forged and stamped and consists of two symmetrical halves made from high-grade stainless steel. Its labour-intensive manufacturing process gives the product its outstanding quality. The connecting link may be divided and used for the universal assembly of chain slings, master links, master link assemblies, shortenings, shackles and other accessories and is guaranteed to be compatible with all pewag winner inox components of/for the same nominal size. The suspension bolt is locked by a stainless steel coil spring (mat. 1.4462) with a synthetic leeve. The bolt and the shell are available as spare parts.

The manufacturing process of the CWI Connex connecting link is similar to EN 1677-1. The product is suitable for straight pulling only; the simultaneous application of loads by two or more legs must be avoided. After the universally usable connecting link has been assembled and disassembled three times, it is recommended to use a new bolt and a new shell, to be mounted securely by a professional, to ensure that the quality of the product remains unimpaired. CBHWI spare part sets are available.

It is resistant to sea water and ideally suited for use in water and wastewater applications and can also be used in connection with chemicals and food products; however, restrictions will apply. The stamp and the CE-mark ensure that the product is clearly identifiable.



### CWI Connex connecting link

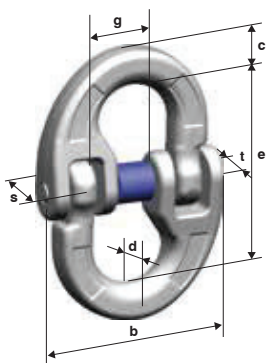

Code	Load capacity [kg]	e [mm]	c [mm]	s [mm]	t [mm]	d [mm]	b [mm]	g [mm]	Weight [kg/pc.]
CWI 5-6	630	36	7	10	11	7	34	13	0.06
CWI 6-6	900	42	8	11	12	7	40	13	0.08
CWI 7-6	1,250	54	9	13	14	9	51	17	0.14
CWI 8-6	1,600	58	10	13	14	8.50	51	17	0.16
CWI 10-6	2,500	73	13	18	18	13	70	25	0.37
CWI 13-6	4,250	92	17	23	25	17	86	29	0.76
CWI 16-6	6,300	104	21	32	28	20	105	37	1.41

Number close to code constitutes chain, used in combination with product.

Material: 1.4462 (AISI F51 / AISI 318 LN)  
Material for bolt, sleeve and spring see spare parts set

