



HIK 10 M

Features & benefits ↓

- Consists of:
 - 2x Multi Purpose cylinder, 1x Hydraulic wedge
 - 4x Extension tube
 - 1x Connection socket, 1x Connection nipple
 - 1x Round base plate
 - 1x Cross head, 1x Wedge head
 - 1x Cylinder toe, 1x Plunger toe
 - 1x Plunger adapter, 1x Cylinder body adapter
 - 1x Pump with pressure gauge
 - 1x 2 meter hose with male coupler
 - 1x Storage case

Available on request ↓

- Cylinders manufactured in conformity with customer specifications

Additional information ↓

ATTENTION: Consult the user manual before fitting cylinder accessories to these cylinders. The maximum working pressure and total construction length is restricted when using cylinder accessories!

Multi purpose cylinders

page

26

Parts

page

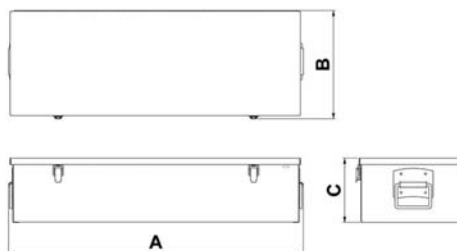
86

Multi purpose cylinder set - Set ↓

model	HIK 10 M	
art no	100.062.003	
return type	spring	
material	steel	
weight, ready for use	kg	44.0



Multi purpose cylinder set - Set (dimensions) ↓

model	HIK 10 M	
dimension A	mm	782
dimension B	mm	287
dimension C	mm	171









Multi purpose cylinder set - Parts







image	description	model	art no
	High quality Multi Purpose Cylinder. Fitted with unique features that considerably lengthen its life span and service life. Offers appropriate solutions for the most varied applications. Holmatro Multi Purpose Cylinders come in 50 models and are available in different capacities and with different stroke lengths.	HGC 10 S 5	100.112.219
	High quality Multi Purpose Cylinder. Fitted with unique features that considerably lengthen its life span and service life. Offers appropriate solutions for the most varied applications. Holmatro Multi Purpose Cylinders come in 50 models and are available in different capacities and with different stroke lengths.	HGC 10 S 15	100.112.221
	Hydraulic wedge, spring return <ul style="list-style-type: none"> • To lift a load from a flat surface where there is a minimum insertion space available • Highly suitable to carry out maintenance in places that are difficult to access • Applications: lifting machines, dismantling and assembly, adjustment and alignment 	HW 1000	100.562.009
	Extension tube <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Length: 125 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	125 - HGC 10 / HCJ 10	100.002.984
	Extension tube <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Length: 250 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	250 - HGC 10 / HCJ 10	100.002.985
	Extension tube <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Length: 500 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	500 - HGC 10 / HCJ 10	100.002.987
	Extension tube <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Length: 750 mm • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	750 - HGC 10 / HCJ 10	100.002.989
	Connection socket <ul style="list-style-type: none"> • To connect 2 extension tubes • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female (2x) • Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.980

Multi purpose cylinder set - Parts


image	description	model	art no
	Connection nipple <ul style="list-style-type: none"> • To connect accessories to cylinders • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT male (2x) • Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.982
	Round base plate <ul style="list-style-type: none"> • To mount on bottom side of cylinder • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.978
	Cross head <ul style="list-style-type: none"> • To provide better grip • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.966
	Wedge head <ul style="list-style-type: none"> • For spreading • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar 	HGC 10 / HCJ 10	100.002.968
	Cylinder toe <ul style="list-style-type: none"> • Suitable for HGC 10 cylinders • Thread size: 2¼"-14 UNS female • Max. working pressure: 144 bar 	HGC 10	100.002.992
	Plunger toe <ul style="list-style-type: none"> • Suitable for HGC 10 and HCJ 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 144 bar 	HGC 10 / HCJ 10	100.002.991
	Cylinder body adapter <ul style="list-style-type: none"> • Suitable for HGC 10 cylinders • Thread size: 1¼" NPT female • Max. working pressure: 360 bar • Standard supplied with 2x bolt M8x16 	HGC 10	100.002.969
	Plunger Adapter <ul style="list-style-type: none"> • Suitable for HGC 10 cylinders • Thread size: 1¼" NPT male - 1"-8 UNC male • Max. working pressure: 360 bar 	HGC 10	100.002.964

Multi purpose cylinder set - Parts


image	description	model	art no
	The PA 04 H 2 is the most compact, single acting, 2 stage hand pump in the hand pump range. The pump is ergonomically designed, has a robust, compact construction, is service- and maintenance-friendly and combines a low operating force with a high oil output. This all combined with a range of handy features makes this pump a worthwhile asset for you and your tools. This pump is ideal when you are working with smaller hydraulic tools and you want to profit from a very high oil output in the first stage (up to 45 bar) to speed things up.	PA 04 H 2	100.142.033
	Standard hose with male coupler A 119 on one side	H 2 SOU	100.572.102
	Pressure gauge set PA 04/09 pump <ul style="list-style-type: none"> • 0-720 bars • Pointer damped with glycerine • Stainless steel • Housing Ø 63 mm • Including rubber protection cover • Connection: ¼" NPT male 	-	100.182.213
	Carrying storage box of hydraulic jack set HIK 10 M / HRK 10 M	-	150.581.001

